



North American Coating Laboratories  
We're Here to Help

## **TECHNICAL DATA SHEET**

### **8-12 $\mu$ m Broadband Anti-Reflective Coating on Zinc Sulfide**

#### **Overview**

This anti-reflective/high transmission thin-film coating is optimized to cover the 8-12 $\mu$ m LWIR region and conforms to the multiple environmental requirements. Typically, this coating is utilized in Forward Looking Infrared (FLIR) and or passive thermal radiation systems.

#### **Spectral Performance**

Transmission as measured through dual surface coated ZnS witness sample:

- T  $\geq$ 97.5% average from 8-12 $\mu$ m at standard incidence.

Reflection as measured from a single surface coated ZnS witness sample:

- R  $\geq$ 0.5% average from 8-12 $\mu$ m at standard incidence.

As with virtually all of NAACL's coatings, this formula can be modified for similar performance at other wavelengths.

#### **Mechanical and Environmental Requirements**

This coating is designed to meet durability requirements of the following Military Specifications:

Adhesion MIL-C-48497 & MIL-C-675C

Humidity MIL-C-48497 & MIL-C-675C

Moderate Abrasion MIL-C-48497 & MIL-C-675C

This formula can be modified for Severe Abrasion performance on ZnS; however, the spectral performance may be affected. Contact us now for any questions on this or any other coatings we offer.

CONNECT WITH US




9450 PINENEEDLE DRIVE  
MENTOR, OH 44060

(866) 216-6225  
NAACL.COM




North American Coating Laboratories  
We're Here to Help

### Spectral Performance Curves

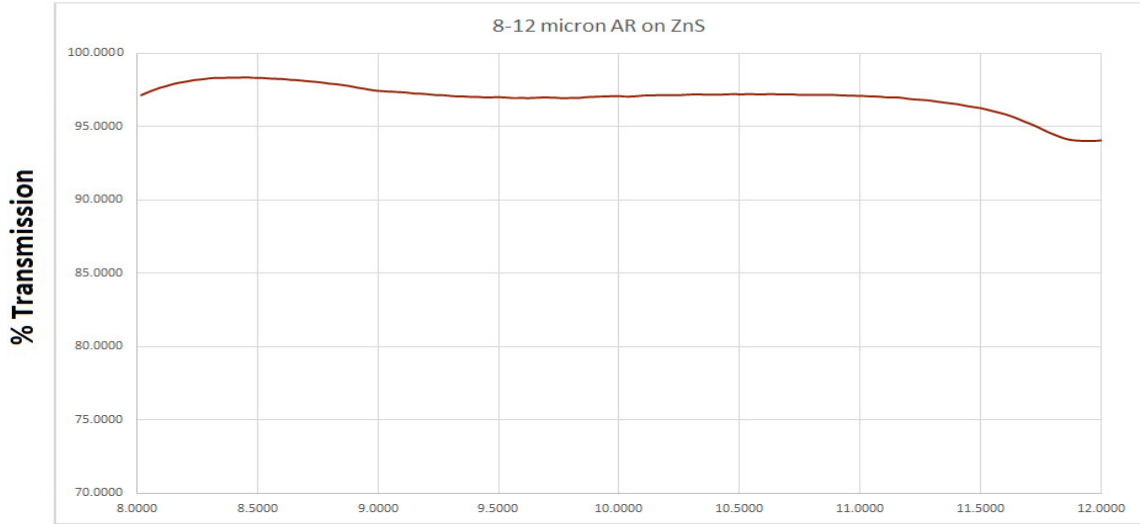

Operating Wavelength

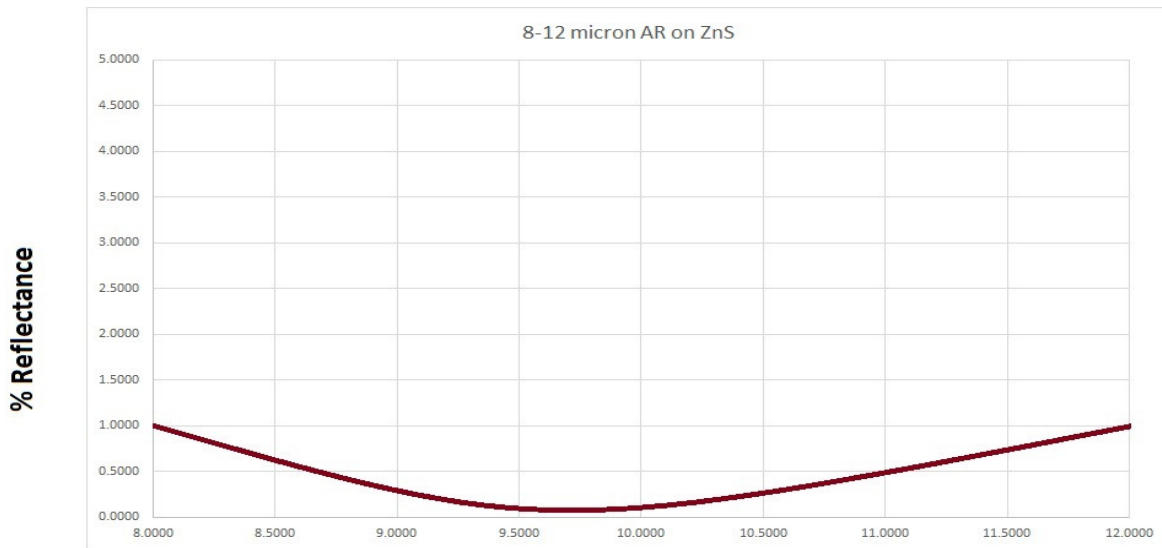

Operating Wavelength

CONNECT WITH US



9450 PINENEEDLE DRIVE  
MENTOR, OH 44060

(866) 216-6225  
NACL.COM